

Robust tow tractor with full suspension axles (front and rear) for indoor and outdoor use

Comfortable operation

Automatic parking brake

Electronic speedCONTROL enables smooth acceleration and customization of travel speed settings

High energy efficiency with maintenance-free AC technology

Weather protection cabins (optional)



EZS 570NA / 580NA / 590NA

Tow Tractor (15,400 / 17,600 / 19,800 lbs.)

The Jungheinrich® EZS series includes versatile, economic tow tractors for towing loads up to 19,800 lbs. The ability to connect several trailers together helps to provide flexibility and increased efficiency in most material handling operations.

The coupler is visible from the operator seat position and is easily accessible. The semi-automatic remote release (optional) allows the connecting and disconnecting of trailers without the operator having to leave the vehicle, helping to save both time and money. The EZS tow tractors are also available with many different hitches to allow it to fit virtually every trailer type.

The 48-volt drive motor, which utilizes advanced AC technology, provides additional power.

The key advantages:

- Powerful acceleration.
- High top speed with significant energy savings.
- Extended operating times.
- Reduced maintenance through omission of carbon brushes.


The EZS series is designed with optimum ergonomic features. The standard full-suspension chassis (both front and rear axles) helps to dampen the effects of traveling over uneven surfaces, providing a more comfortable ride for the operator.

The position of the operator seat provides ample leg room while still allowing the operator to be in close proximity to the load. The low step is ideal for effortless entry and exit from the tow tractor.


The short turning radius of the EZS tow tractors helps operators move in tight spaces with minimal effort, while the full-suspension axles offer both comfort and stability during travel. The tow tractor also features an electric parking brake, which automatically engages when the truck is not moving – reducing the chance of rollbacks when operating on sloped surfaces.

EZS 570NA

Technical data

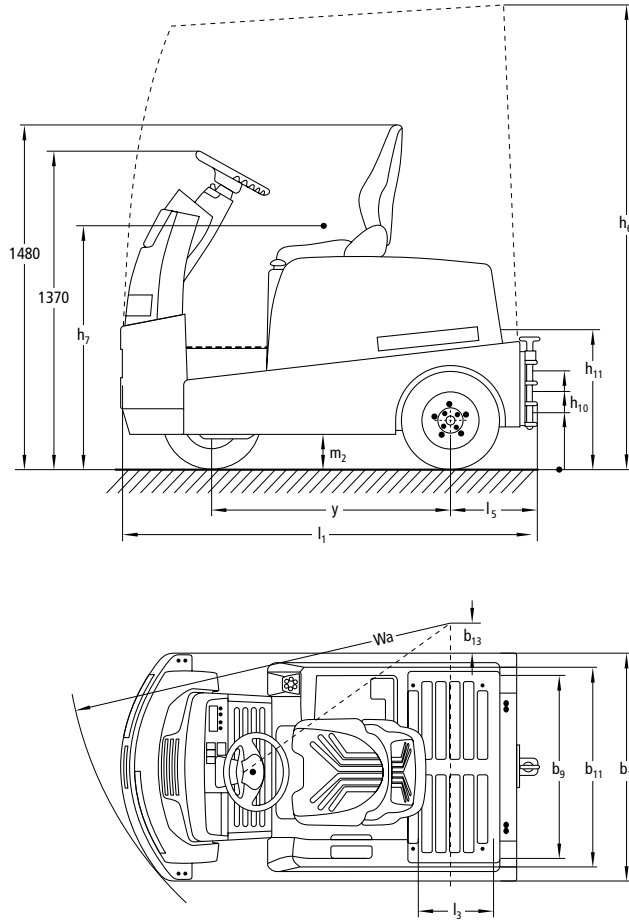

Performance Diagram EZS 570NA

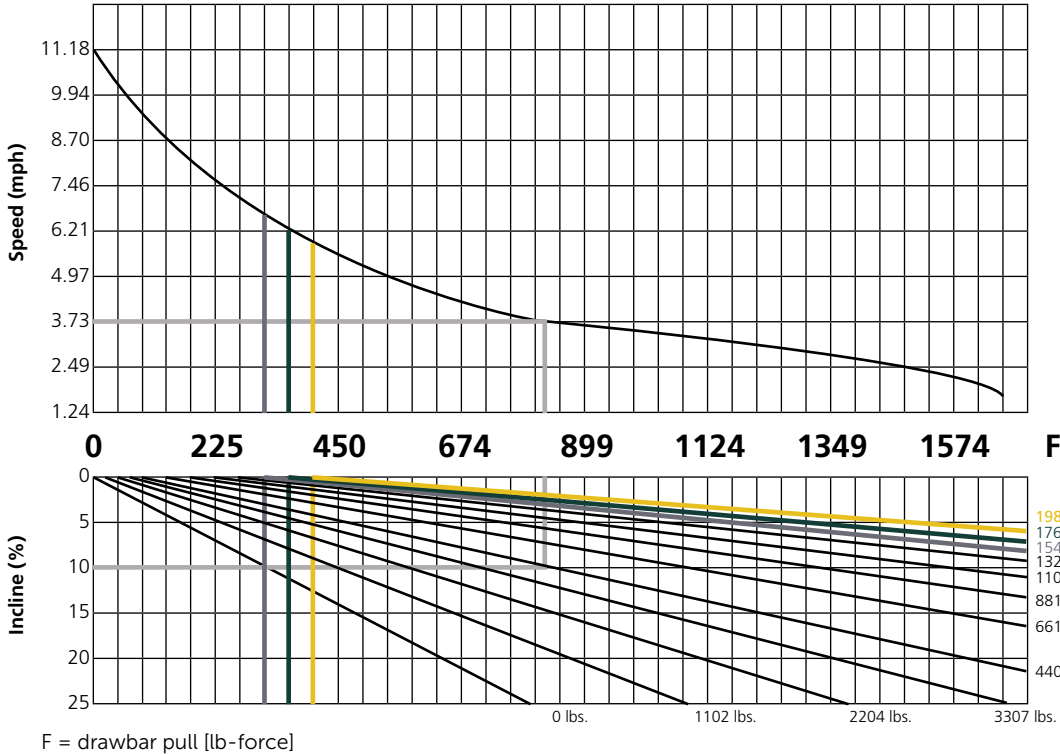

Characteristics	1.1	Manufacturer
	1.2	Manufacturer's type designation
	1.3	Power type
	1.4	Operator position
	1.5	Load capacity / rated load
	1.7	Rated tractive power
Weights	1.9	Wheelbase
	2.1	Service weight without battery
	2.1.1	Service weight including minimum weight battery
Wheels, Chassis	2.3	Axle loading, unloaded front / rear
	3.1	Tire type / material
	3.2	Tire size, drive (rear)
	3.3	Tire size, rear (front)
	3.5	Wheels, number drive / load (x=driven)
	3.7	Tread width, rear
	Dimensions	4.7
4.8		Seat height / ground to seat index point
4.12		Coupling height
4.19		Overall length
4.21		Overall width
4.32		Ground clearance, center of wheelbase
4.35		Minimum outside turning radius
Performance	4.36	Internal turning radius
	5.1	Travel speed, loaded / unloaded
	5.5	Drawbar pull with / without load
	5.6	Maximum drawbar pull with / without load
	5.7	Gradeability loaded / empty
Electrical	5.10	Service brake
	6.1	Drive motor(rating 60 minutes)
	6.4	Battery voltage / nominal capacity
	6.5	Battery weight (minimum / maximum)
	6.5.1	Battery dimensions (length x width x height)
Other	8.1	Type of drive control
	8.4	Sound level at driver's ear

Example:

When the EZS 570NA pulls a 4,409 lb. load up a 10% grade, it requires 770 lbs. of drawbar pull and achieves a maximum speed of 3.73 mph.

Notes:

- Continuous operation over below (force) is not permitted.
EZS 570 NA: 314 lbs. (force)
EZS 580 NA: 360 lbs. (force)
EZS 590 NA: 405 lbs. (force)
- The use of braked trailers is strongly recommended for operation on upward / downward grades over 4%.

F = drawbar pull [lb-force]

			Jungheinrich		Jungheinrich		Jungheinrich	
			EZS 570NA		EZS 580NA		EZS 590NA	
			electric		electric		electric	
			seated		seated		seated	
Q	lb	kg	15,400	7,000	17,600	8,000	19,800	9,000
F	lb-force	N	314	1,400	359	1,600	404	1,800
y	in	mm	40.7 ³⁾	1,035 ³⁾	40.7 ³⁾	1,035 ³⁾	40.7 ³⁾	1,035 ³⁾
	lb	kg	1,510 ²⁾	685 ²⁾	1,643 ²⁾	745 ²⁾	1,841 ²⁾	835 ²⁾
	lb	kg	2,778 ³⁾	1,260 ³⁾	2,847 ¹⁵⁾	1,291 ¹⁵⁾	3,045 ¹⁴⁾	1,381 ¹⁴⁾
	lb	kg	1,278 / 1,499 ⁴⁾	580 / 680 ⁴⁾	1,278 / 1,632 ¹⁵⁾	580 / 740 ¹⁵⁾	1,367 / 1,742 ¹⁵⁾	620 / 790 ¹⁵⁾
			solid pneumatic		solid pneumatic		solid pneumatic	
	in	mm	16.5 x 4.7 (4.00-8 / 97 A5)	422 x 121 (4.00-8 / 97 A5)	16.5 x 4.7 (4.00-8 / 97 A5)	422 x 121 (4.00-8 / 97 A5)	16.5 x 4.7 (4.00-8 / 97 A5)	422 x 121 (4.00-8 / 97 A5)
	in	mm	17 x 6.5 (16x6-8 / 113 A5)	434 x 164 (16x6-8 / 113 A5)	17 x 6.5 (16x6-8 / 113 A5)	434 x 164 (16x6-8 / 113 A5)	17 x 6.5 (16x6-8 / 113 A5)	434 x 164 (16x6-8 / 113 A5)
	in	mm	1 / 2x		1 / 2x		1 / 2x	
b ₁₁	in	mm	34.3	870	34.3	870	34.3	870
h ₆	in	mm	84.3	2,140	84.3	2,140	84.3	2,140
h ₇	in	mm	40.9	1,040	40.9	1,040	40.9	1,040
	in	mm	9.4 ⁵⁾	240 ⁵⁾	9.4 ⁵⁾	240 ⁵⁾	9.4 ⁵⁾	240 ⁵⁾
l ₁	in	mm	71.4 ⁶⁾	1,813 ⁶⁾	71.4 ⁶⁾	1,813 ⁶⁾	71.4 ⁶⁾	1,813 ⁶⁾
b ₁	in	mm	39.2	996	39.2	996	39.2	996
m ₂	in	mm	6.3	160	6.3	160	6.3	160
Wa	in	mm	63.8 ⁷⁾	1,620 ⁷⁾	63.8 ⁷⁾	1,620 ⁷⁾	63.8 ⁷⁾	1,620 ⁷⁾
b ₁₃	in	mm	23.6 ⁸⁾	600 ⁸⁾	23.6 ⁸⁾	600 ⁸⁾	23.6 ⁸⁾	600 ⁸⁾
	mph	km/h	5.3 / 11.2	8.5 / 18	5.3 / 11.2	8.5 / 18	5.3 / 11.2	8.5 / 18
	lb-force	N	314	1,400	360	1,600	405	1,800
	lb-force	N	1,236	5,500	1,349	6,000	1,686	7,500
	%		— ⁹⁾		— ⁹⁾		— ⁹⁾	
			hydraulic		hydraulic		hydraulic	
	HP	kW	6.0	4.5	6.0	4.5	6.0	4.5
k ₅	V/Ah		48 / 375 ¹⁰⁾		48 / 375 ¹⁰⁾		48 / 375 ¹⁰⁾	
	lb	kg	1,204 / 1,332 ¹¹⁾	546 / 604 ¹¹⁾	1,204 / 1,332 ¹¹⁾	546 / 604 ¹¹⁾	1,204 / 1,332 ¹¹⁾	546 / 604 ¹¹⁾
	in	mm	16.1 x 32.5 x 24.6 ¹²⁾	411 x 827 x 627 ¹²⁾	16.1 x 32.5 x 24.6 ¹²⁾	411 x 827 x 627 ¹²⁾	16.1 x 32.5 x 24.6 ¹²⁾	411 x 827 x 627 ¹²⁾
			Impulse / Mosfet AC		Impulse / Mosfet AC		Impulse / Mosfet AC	
	dB (A)		57		57		57	
			1) with (XL) battery compartment: 49.2 in (1,250 mm) 2) with (XL) battery compartment: +166 lb (+75 kg) 3) with (XL) battery compartment: +793 lb (+360 kg) 4) with (XL) battery compartment: 1,720 / 1,852 lb (780 / 840 kg) 5) other coupling heights available 6) with (XL) battery compartment: 80.1 in (2,035 mm) 7) with (XL) battery compartment: 73.2 in (1,860 mm) 8) with (XL) battery compartment: 26.2 in (665 mm)			9) see diagram 10) with (XL) battery compartment: 48 V (625 Ah) 11) with (XL) battery compartment: 1,204 / 2,050 lb (546 / 930 kg) 12) with (XL) battery compartment: 24.8 x 32.6 x 24.6 in (630 x 830 x 627 mm) 13) with (XL) battery compartment: +154 lb (+70 kg) 14) with (XL) battery compartment: -44 lb (-20 kg) 15) with (XL) battery compartment: 1,841 / 1,852 lb (835 / 840 kg)		

This specification sheet only provides technical values for the standard truck. Non-standard tires, different masts, additional equipment, etc., could produce other values. Rights reserved for technical changes and improvements.

The Jungheinrich Advantage

Efficient AC technology

Jungheinrich motors with AC technology provide increased efficiency and reduced operating costs while also offering:

- Higher efficiency with excellent energy consumption.
- Powerful acceleration.
- High top speed, even when loaded.
- Stepless travel direction changes.
- No carbon brushes – the drive motor is maintenance-free.

Comfortable, productive operation

The electronic speedCONTROL management system and automatic electric braking system work together to facilitate comfortable and secure operation of the vehicle. Adjustment opportunities are available to suit many applications:

- The travel speed set by the position of the accelerator is automatically maintained regardless of gradient.
- Three programmable performance modes to suit various applications.
- Regenerative braking returns energy to the battery during deceleration.
- Secure starting and stopping, even on slopes, with the electric parking brake, which automatically engages when stationary and automatically releases when starting.
- Crawl speed button for traveling at reduced speed (speed adjustable).



Ergonomic low step for effortless entry and exit to and from the vehicle

Optimum ergonomics

- Low step for effortless entry and exit from the vehicle.
- Close proximity of operator position to trailer and load.
- Highly visible and accessible coupling.
- Multiple storage areas for the operator.

Rugged construction for demanding applications

- Chassis made of high-quality 0.31 inch thick plate steel.
- Extra high bumper on the front end.
- 2-level (driving + daytime) LED forward working lights.
- Robust, high-intensity LED rear lights and indicators.

Long operating times

- Energy efficient AC technology and high battery capacity, together with regenerative braking, provide longer operating times.
- Optional extra large battery compartment to allow for extended run times.

Well informed at any time

Easy-to-read display and instruments help keep the operator informed of critical information:

- Battery discharge indicator, operation hours, travel speed and fault diagnostics.
- Adjustable travel parameters.



Clear layout of controls provides easy operation of the tow tractor

Available options

The EZS tow tractors may be customized to fit your individual application:

- Fast, easy connecting/disconnecting of trailers with semi-automatic remote unlocking from the operator position.
- Inching controls for simple coupling connect and disconnect.
- Non-marking, solid pneumatic tires.
- PIN (personal identification number) activation of the vehicle.
- Supplementary chassis protection made from steel.
- Holder for RF data communications components.
- Different couplers.
- The built-in battery allows for convenient charging with no need to open panels.
- Cab with a variety of accessories for traveling outside warehouses.

Parts when you need them

Jungheinrich's Parts Fast or Parts Free Guarantee ensures next-business-day delivery by 5:00 PM of all Jungheinrich parts in the United States, or they're free, including freight. For customers in Canada and Mexico, the guarantee ensures shipping of parts within 24 hours from the time the order was placed by the dealer. See your local Jungheinrich dealer for program details.

* Programs may be subject to change without notice and may vary by region. Please ask your local Jungheinrich dealer for complete terms and conditions.

Built in compliance with ANSI/ITSDF B56.1 design specifications for Type E industrial trucks with type EO battery.